POWTRAN®

PI550 series

PI550 5R5G2

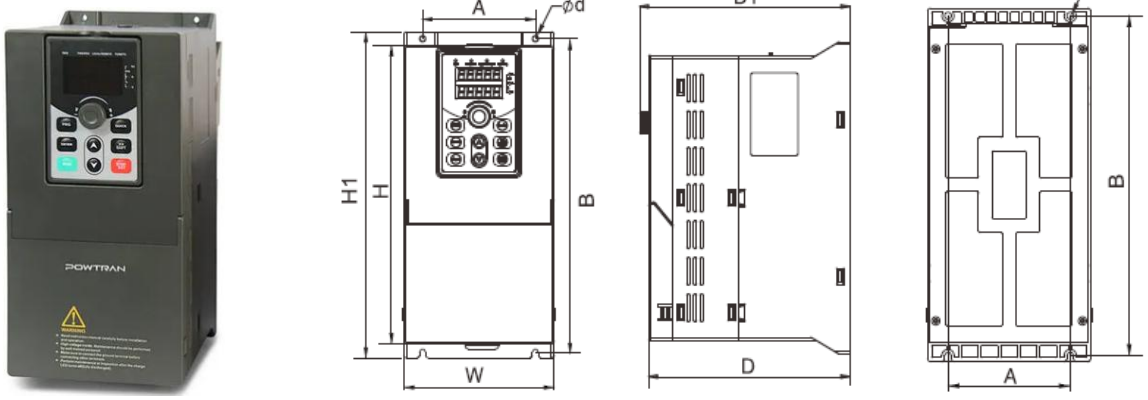

Voltaje de entrada	3 fases AC 220V (-15%)～240V (+10%)
Corriente de entrada	28A
Potencia de salida	7.5 HP
Corriente de salida	25A

Dimensiones (mm)					**Dimensiones de instalación (mm)**			**Peso (kg)**
H	H1	W	D	D1	A	B	d	
238	260	120	182	190	90	250	5	2.7

Unidad de freno / Resistencia de freno opcional (sugerido)					
Unidad de frenado dinámico		**Selección de resistencia de frenado (100 % de par de frenado, 10 % de cantidad de frenado, máximo 10 segundos)**			
Modelo	**Cantidad**	**Valor de resistencia**	**Potencia de resistencia**	**Cantidad de resistencia**	**Resistencia de frenado mínima permitida**
Integrada	/	26Ω	0.8 KW	1	15 Ω

Diagrama

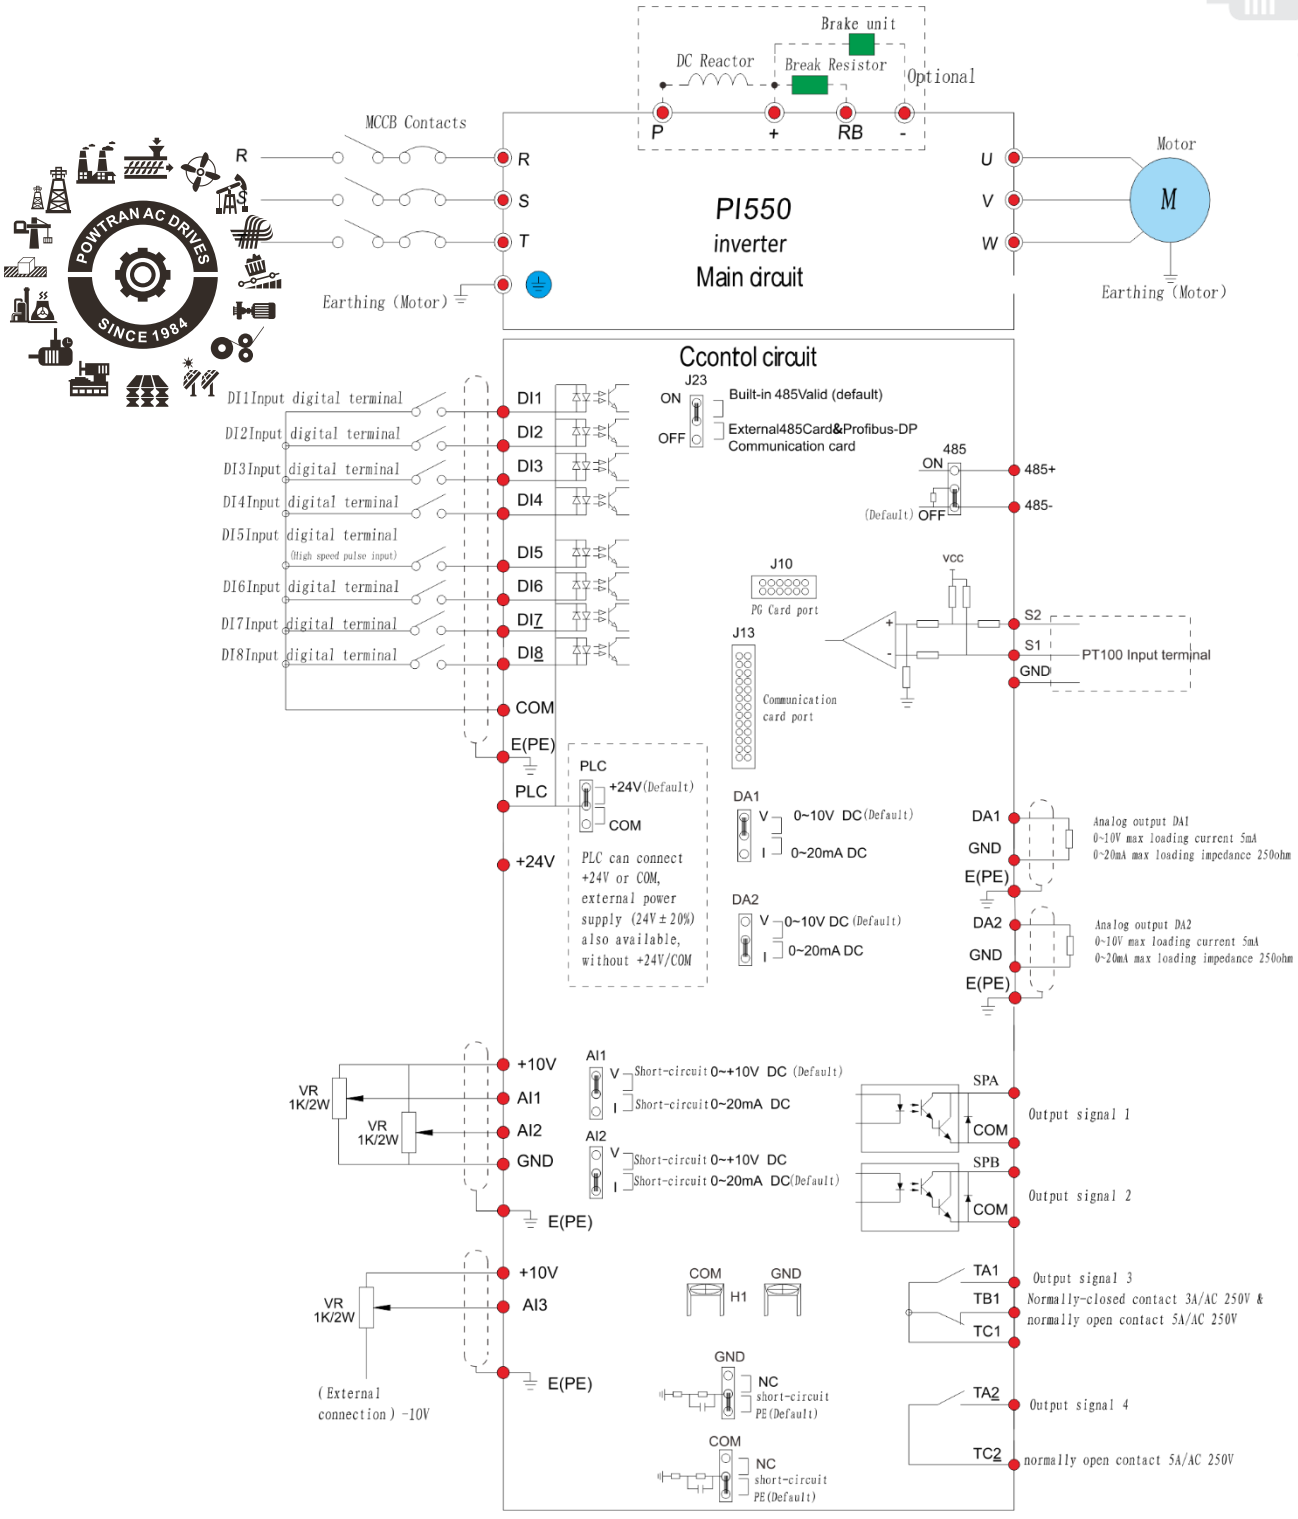
Brake unit
DC Reactor
Break Resistor
Optional
P
+
RB
-
MCCB Contacts
R
S
T
Earthing (Motor)
PI550
inverter
Main circuit
U
V
W
Motor
M
Earthing (Motor)
Ccontol circuit
DI1Input digital terminal
DI2Input digital terminal
DI3Input digital terminal
DI4Input digital terminal
DI5Input digital terminal
(High speed pulse input)
DI6Input digital terminal
DI7Input digital terminal
DI8Input digital terminal
DI1
DI2
DI3
DI4
DI5
DI6
DI7
DI8
COM
E(PE)
PLC
+24V
PLC
+24V(Default)
COM
PLC can connect +24V or COM, external power supply (24V±20%) also available, without +24V/COM
J23
ON
OFF
Built-in 485Valid (default)
External485Card&Profibus-DP Communication card
485
ON
(Default) OFF
485+
485-
J10
PG Card port
J13
Communication card port
VCC
S2
S1
GND
PT100 Input terminal
DA1
V
I
0~10V DC(Default)
0~20mA DC
DA2
V
I
0~10V DC (Default)
0~20mA DC
DA1
GND
E(PE)
Analog output DA1
0~10V max loading current 5mA
0~20mA max loading impedance 250ohm
DA2
GND
E(PE)
Analog output DA2
0~10V max loading current 5mA
0~20mA max loading impedance 250ohm
VR 1K/2W
VR 1K/2W
+10V
AI1
AI2
GND
E(PE)
AI1
V
I
Short-circuit 0~+10V DC (Default)
Short-circuit 0~20mA DC
AI2
V
I
Short-circuit 0~+10V DC
Short-circuit 0~20mA DC(Default)
SPA
COM
Output signal 1
SPB
COM
Output signal 2
VR 1K/2W
+10V
AI3
E(PE)
(External connection) -10V
COM
GND
H1
TA1
TB1
TC1
Output signal 3
Normally-closed contact 3A/AC 250V & normally open contact 5A/AC 250V
GND
NC
short-circuit
PE(Default)
TA2
Output signal 4
COM
NC
short-circuit
PE(Default)
TC2
normally open contact 5A/AC 250V